

HSD ES 369L 6P 7,00kW H1


Flüssigkeitsgekühlt Liquid cooling

FNZ4100058

HSD S.p.A www.hsd.it
Via della Meccanica, 16
61122 PESARO (Italy)

ASYNCHRONOUS
3-PHASE MOTOR
DREHSTROM-
ASYNCHRONMOTOR

Ta: 20°C
Ins. Cl. F

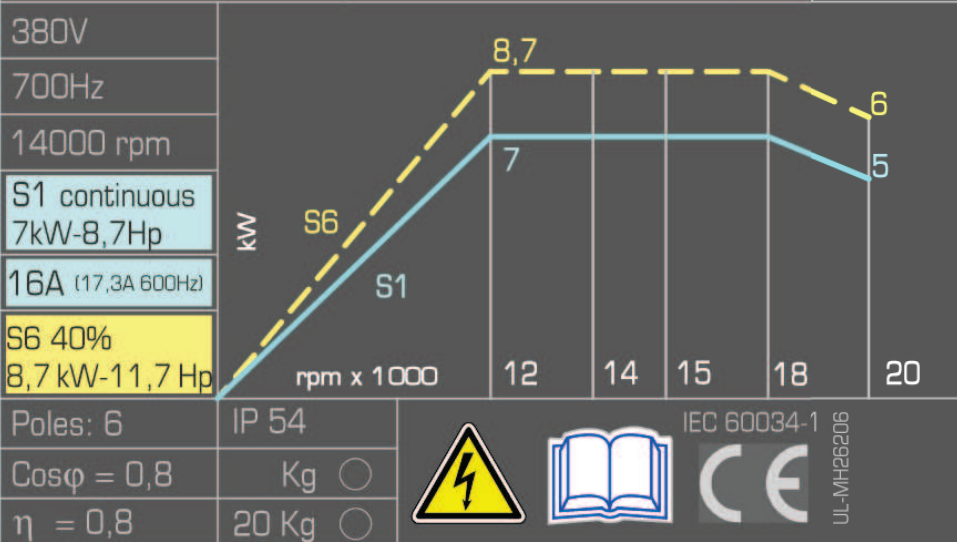

FNZ4100152 Rev.00 (Sp.106.065.62)

Tensione nominale (*)	Nennspannung (*)	Rated voltage (*)	V	325	380	380	380	380					
Frequenza nominale	Nennfrequenz	Rated frequency	Hz	600	700	750	900	1000					
Velocità nominale	Nominale Geschwindigkeit	Rated speed	rpm	12000	14000	15000	18000	20000					
Tipo di servizio	Betriebsart	Duty type		S1 cont	S6 40%	S1 cont	S6 40%	S1 cont	S6 40%	S1 cont	S6 40%	S1 cont	S6 40%
Potenza nominale	Nennleistung	Rated power	kW	7	8,7	7	8,7	7	8,7	7	8,7	5	6
Coppia nominale	Nennmomento	Rated torque	Nm	5,6	6,9	4,8	6	4,5	5,5	3,7	4,6	2,4	2,9
Corrente nominale	Nennstrom	Rated current	A	17,3	21,6	16	20	16	20	16	20	15,3	19
Rendimento nominale η	Nennwirkungsgrad η	Rated efficiency η		0,8									
fattore di potenza cos φ	Leistungsfaktor cos φ	Power factor cos φ		0,8									
Numero di poli	Polzahl	Number of poles		6									
Classe di isolamento	Isolierklasse	Insulation class		F									
Tipo di raffreddamento	Kühlungstyp	Type of cooling		Raffreddamento a liquido / Flüssigkeit / Liquid cooling									
Peso versione NASO CORTO	Gewicht Version KURZE NASE	Weight of SHORT NOSE variant	kg	~ 20									

[(*) fornita da inverter] [(*) von Inverter geliefert] [(*) from inverter]